



TEST REPORT FOR REACTION TO FIRE

Test Report No.: 022738-01/02

Issued: 16. 12. 2020

Notified Body No. 1014

Name of product: Alarm(Security) cable
Type of product: 24 x AWG24

Ratings: E_{ca}
Serial number: -
Manufacturer: **Ningbo Exact Cables & Wire Co.,Ltd.**
No.227 Yuncai Road,Yunlong Industrial Zone, Yinzhou
District, Ningbo, 315040,People republic of China

Production site: same as manufacturer
Ordering firm: **Ningbo Exact Cables & Wire Co.,Ltd.**
No.227 Yuncai Road,Yunlong Industrial Zone, Yinzhou
District, Ningbo, 315040,People republic of China

Number of tested samples: 1
Samples submitted on: 9. 12. 2020
Location of testing: Elektrotechnický zkušební ústav, s. p.
Tests performed from 7. 12. 2020 through 9. 12. 2020
Other data: -
Tested according to: EN 60332-1-2:04+A1:15+A11:16,
EN 60332-1-1:04+A1:15

Compiled by: Vladimír Moždík

Approved by: Jan Tůma
Testing laboratory technical manager

No. of pages: 3

No. of annexes: 0

No. of annexes pages: 0

The test results stated in the test report apply only to the tested subject and unless specified otherwise in the test report, the tests were performed using the method and under the conditions determined in the test regulations, technical norm, instructions for use and information provided by the manufacturer on the tested subject and using accessories required by the manufacturer.

Without written consent from Elektrotechnický zkušební ústav, s. p. this report must not be reproduced in any other way than as a whole.
Elektrotechnický zkušební ústav, s. p., Testing laboratory No. 1056 accredited by CAI according to ČSN EN ISO/IEC 17025:2018.

Test	Prescribed			Observed
Test on complete cable				
24 x AWG24 white				
Test for vertical flame propagation EN 60332-1-2, article 5 EN 60332-1-2, article 6 - outer diameter - flame application time - not damage area from lower edge of the top support - damage area from lower edge of the top support - flame spread H		[mm]		6,7
		[s]	60	60
	min.	[mm]	50	362
	max.	[mm]	540	481
	≤	[mm]	425	119

Test type: **Classification of electric cables according to reaction to fire**

Standard: EN 50575, EN 13501-6,
 EN 60332-1-2, EN 60332-1-1

Test of vertical flame spread on a single cable

Cable type: 24 x AWG24 **white**

Cable producer: Ningbo Exact Cables & Wire Co.,Ltd.


date of test: 9. 12. 2020

Classification according to EN 13501-6: E_{ca}

EN 60332-1-2



Before test

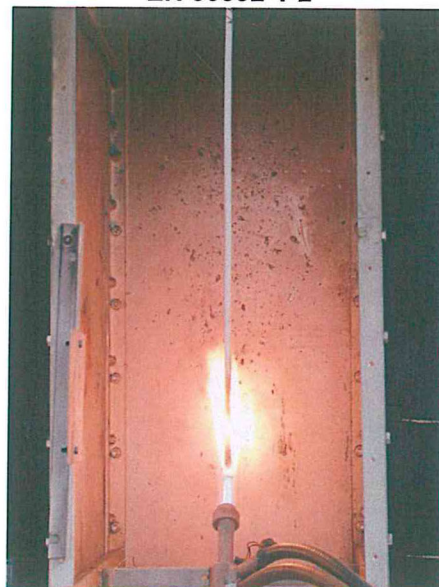

Course of the tests



After test

Measuring and testing equipment

Using - mark.X	sort, type	registration number
X	Metter 100 cm	N 400013
X	Slide caliper	259
X	Table stopwatch	551705
X	Test under fire conditions	20 780

If an uncertainty of measurement is given, the expanded a measurement uncertainty is the product of the standard measurement uncertainty and coverage factor $k = 2$, which corresponds to a coverage probability of approximately 95% in a normal distribution.

Laboratory conditions during the test were in accordance with specifications of the standards listed on the first page of this test report.

Compiled by: Vladimír Moždík



The end of the Test Report